

GBC® AdvancedPunch™

Expand your Xerox® Production Family with finishing options to produce a wider variety of print jobs.

The new GBC AdvancedPunch for the Xerox® Colour 800i/1000i Presses, Xerox® Versant® 2100 Press, Xerox® Versant® 80 Press, Xerox® Colour C60/C70 Printer, Xerox® D Series Copier/Printer and Xerox® D Series Printer lets you create professionally bound documents in-house by combining printing, punching and collating into one convenient step.

Features

- Enables inline printing, punching and collating for ready-to-bind offline applications
- AdvancedPunch module is fully integrated with the printer
- Select from various interchangeable (optional) die sets for popular binding styles; no need for offline manual punching
- Three additional die sets can be stored within the AdvancedPunch module
- User-friendly replacement of die sets without need for levers or tools
- AdvancedPunch module uses a unique waste container sensor design and includes a large waste container to collect scrap punches
- Supports punching of pre-cut tab stock to create punched applications such as manuals, guides or planners

Benefits

- Maximise productivity and lower overall cost of production; reduce setup time and cost associated with manual finishing by providing ready-to-bind documents at the touch of a button
- Add style and versatility to bound documents; up to eleven common punching styles produce ready-to-bind documents at rated speeds
- Easy to create professionally bound documents in-house for commonly used offline binding styles
- Designed for walk-up users or for production professionals



Xerox® Colour 800i/1000i Presses



Xerox® Versant® 2100 Press



Xerox® Versant® 80 Press




Xerox® Colour C60/C70 Printer



Xerox® D Series Copier/Printer



Xerox® D Series Printer

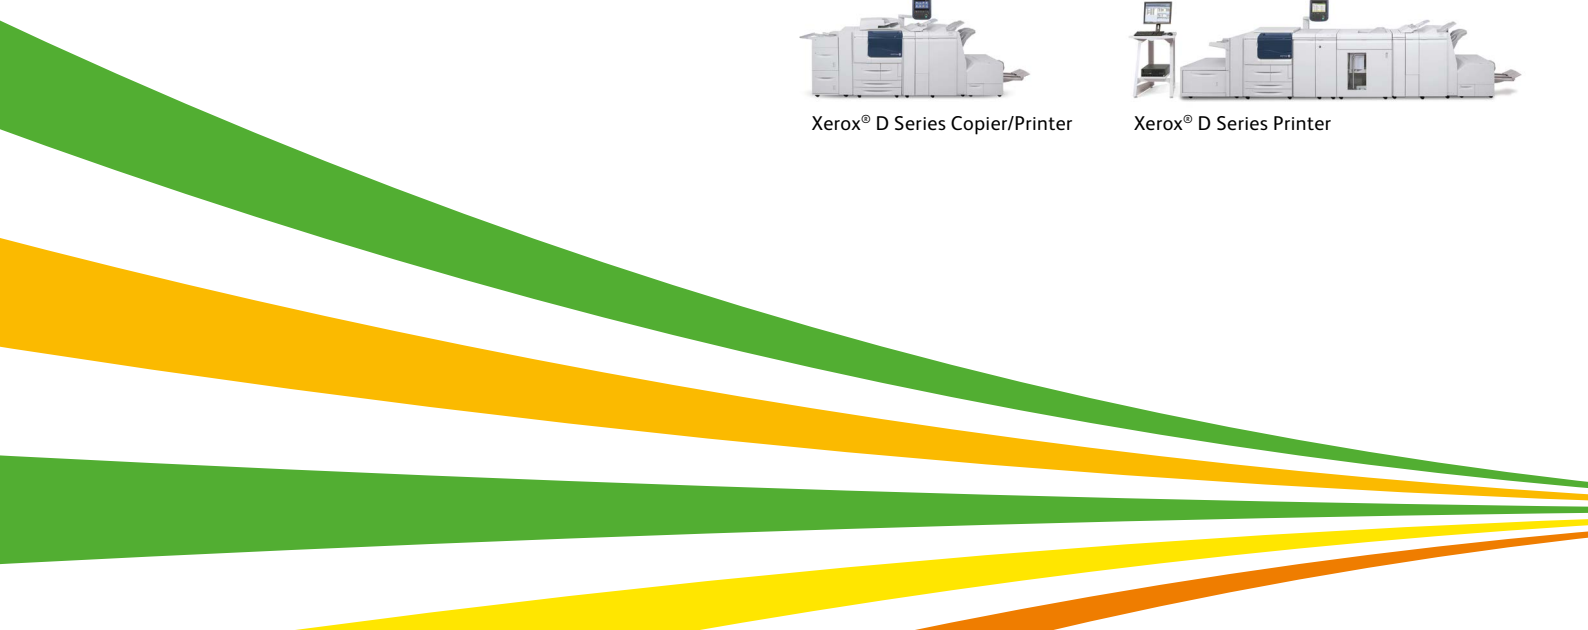

Power Requirements

- 60 Hz/220 Volts, 50 Hz

Dimensions

- 305 mm Width
- 978 mm Height
- 724 mm Depth

Weight

- 70 kg

Paper Type

- Coated and uncoated

Paper Weights

- 75 gsm bond – 216 gsm cover, uncoated
- 106 gsm bond – 216 gsm cover, coated

Paper Size (min/max)


















- A4 long edge feed (297 mm side only)
- Bypass mode up to 330 x 488 mm paper

Punch Type

- Customer replaceable die sets

Note: GBC AdvancedPunch requires the Interface module and follow on finisher – High Capacity Stacker, Light Production Finisher, Booklet Maker Finisher or Light Production Finisher with or without booklet maker.

Die Punch Sets for A4 Size

Description	Punch Pattern	Bind Style
21-Hole Punch CombBind (standard with punch module) • Conventional binding style • Pages lie flat • Editing capability with a machine	 PB Plastic Bind; Hole Size: 8 x 3.2 mm (LxW); Centre-to-Centre Hole Spacing: 14.3 mm	Comb/Cerlox 
20-Hole Punch CombBind • Conventional binding style • Pages lie flat • Editing capability with a machine	 PB Plastic Bind; Australia Hole Size: 8 mm x 3.2 mm (LxW) Centre-to-Centre Hole Spacing: 14.3 mm	
34-Hole Twin Loop™ Binding • Professional and on trend • Pages lie flat with 360° rotation • Permanently binds • Keeps shape with bounce back flexibility	 W3 Wire; Round; 3 Holes per 25.4 mm; Hole Size: 4 mm Diameter; Centre-to-Centre Hole Spacing: 8.5 mm	Twin Loop Wire 
23-Hole Twin Loop Binding • Professional and on trend • Pages lie flat with 360° rotation • Permanently binds • Keeps shape with bounce back flexibility	 W2 Wire; Round; 2 Holes per 25.4 mm; Hole Size: 6.5 mm Diameter; Centre-to-Centre Hole Spacing: 12.7 mm	
34-Hole Twin Loop Binding • High-tech look • Pages lie flat with 360° rotation • Permanently binds	 W3 Wire; Square; Australia; 3 Holes per 25.4 mm; Hole Size: 4 x 4 mm (LxW); Centre-to-Centre Hole Spacing: 8.5 mm	
23-Hole Twin Loop Binding • High-tech look • Pages lie flat with 360° rotation • Permanently binds	 W2 Wire; Square; Australia; 2 Holes per 25.4 mm; Hole Size: 6.4 x 5.5 mm (LxW); Centre-to-Centre Hole Spacing: 12.7 mm	
4-Hole Punch 4 Ring	 4 Ring Binder; European (Standard Loose-leaf Pattern); Hole Size: 8 mm Diameter	2/4 Hole 
2-Hole Punch 2 Ring	 2 Ring Binder; European (Loose-leaf Pattern), Hole Size: 8 mm Diameter	
12-Hole VeloBind® • Most secure style – permanently binds documents • Book-like finish • Great for filing, mailing	 VB VeloBind Round; 1 Hole per 25.4 mm; Hole Size: 3.2 mm Diameter; Centre-to-Centre Hole Spacing: 25.4 mm	VeloBind 
47-Hole Colour Coil™ Bind • Professional and on trend • Pages lie flat with 360° rotation • Permanently binds • Keeps shape with bounce back flexibility	 C4 Coil; Round; 4 Holes per 25.4 mm; Hole Size: 4.5 mm Diameter; Centre-to-Centre Hole Spacing: 6.3 mm	Colour Coil 
34-Hole ProClick® • Professional, upscale look • Fast and easy • Pages lie flat with 360° rotation • Zips and unzips for quick edits	 PC ProClick; Rectangular; 3 Holes per 25.4 mm, Hole size: 5.5 x 5.0 mm; Centre-to-Centre 8.5 mm	ProClick 

Additional dies can be purchased from your local Xerox Supplies Representative.